

WATERCO

water, the liquid of life


UNDER WATER LIGHT LED MK3 REPLACEMENT KIT

Installation Guide

UWL Replacement Kit comes with an Adaptor Plate that can easily replace other major brand of lights.

The major brand of Under Water lights that can be replaced with Waterco's are marked on the Adaptor Plate.

- AQ = Aqua Quip
- SW = Swimworld
- ST = Stroud
- SE = Spa Electric
- PR = Poolrite

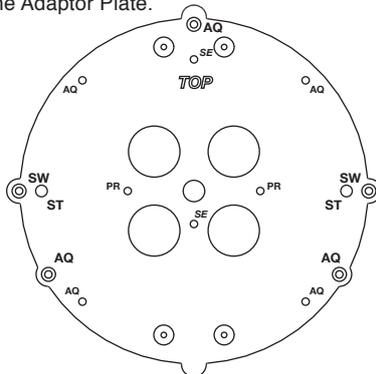

ADAPTOR PLATE

1. Switch off the light and unplug the transformer.
2. Remove the screw securing the light to the mounting bracket. Uncoil the cable at the back of the light and remove the light from the pool.

3. Cut the cable of the existing light where it enters the back plate.



4. Strip the outer insulation by 30mm on the cut cable and strip wires insulation by 6mm. It is important to check the copper wires of the old cable are bright and shiny. Otherwise cut the wires back as above and repeat until bright and shiny copper is shown.




5. Unscrew the gland from the tube connector to expose existing crimped splice connectors and slide the gland over the cut and strip cable making sure the O ring is intact. Insert the exposed wires into the splice connector and crimp.

6. Slide the tube over the crimped splice connectors approximately to the middle and screw in the glands and hand tighten with a bit more effort. Do not use tool. Submerge the connector and light under water to check for leaking air bubbles. Tightened harder if require and repeat test.



Note: Retrofit Connector (IP68).

Easy to use Retrofit Connector, simply crimp both connections with the splice connectors, slide the cable sleeve over the connection and hand tighten the gland nuts.

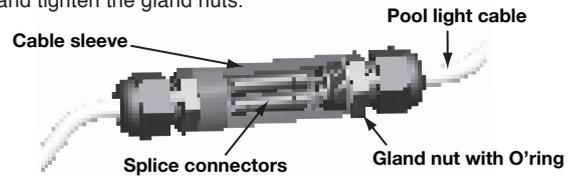


Note: If the power cable is 6mm diameter use the smaller joiner tube and gland nut assembly.



Note: If the power cable is larger than 6mm use the larger stepped joiner tube and gland nut assembly.



7. Coil the cable onto the back plate and slide the new light onto the mounting bracket in the pool, ensure it is properly retained within securing clips. Replace and tighten the securing screw. Make sure the cable does not get pinched by the mounting bracket or securing screw.

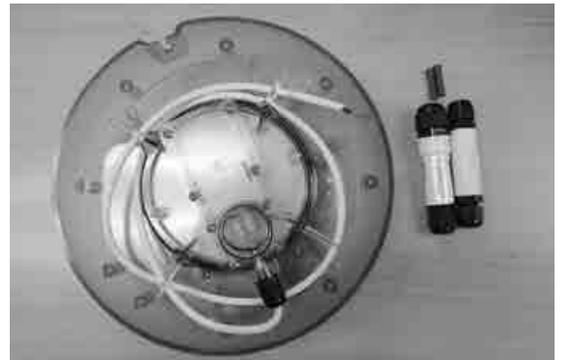

Note:

The Waterco LED Pool Light is supplied with two power cable connectors. The smaller joiner tube and gland nut suits 6mm diameter power cable & the larger stepped joiner & gland nut suits power cable larger than 6mm.

8. The light can now be switched on to check operation.

WATERCO

Waterco Limited ABN 62 002 070 733

OFFICES - AUSTRALIA

NSW - Sydney

(HEAD OFFICE)

Tel : +61 2 9898 8600

VIC/ TAS - Melbourne

Tel : +61 3 9764 1211

WA - Perth

Tel : +61 8 9273 1900

QLD - Brisbane

Tel : +61 7 3299 9900

SA/ NT - Adelaide

Tel : +61 8 8244 6000

ACT Distributor

Tel : +61 2 6280 6476

OFFICES - OVERSEAS

Waterco USA

Augusta, USA
Tel : +1 706 793 7291

Waterco Canada

Longueuil, Qc, Canada
Tel : +1 450 748 1421

Waterco (Europe) Limited

Radfield, Kent, UK
Tel : +44(0) 1795 521 733

Waterco France

SAINT PRIEST, France
Tel : +33 (0)4 72 79 33 30

Waterco (NZ) Limited

Auckland, New Zealand
Tel : +64 9 525 7570

Waterco (C) Limited

Guangzhou, China
Tel : +8620 3222 2180

Waterco (Far East) Sdn. Bhd.

Selangor, Malaysia
Tel : +60 3 6145 6000

www.waterco.com

PT Waterco Indonesia

Jakarta, Indonesia
Tel : +62 21 4585 1481

Waterco International Pte Ltd

Singapore
Tel : +65 6344 2378